


Standard Load Links

Water Weights stocks a large quantity of standard and non-standard load and strain measuring units in our rental stock.

A standard load cell set consists of a load link with two shackles, readout accessories and a transport case. We can supply both cabled (KR type, steel) and wireless (LE type, aluminium) links and guarantee a weighing accuracy of less than 1.5%. The LE type telemetry load cells are ultra-light weight aluminium links.

RS 232 data output and load data logging function is available on request.

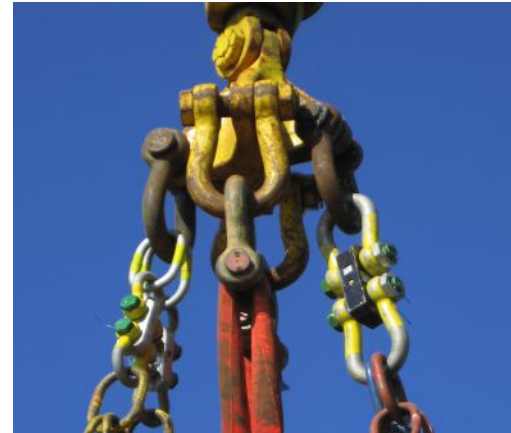

Dimensions

- * Weight 1: Weight of the load link only (without shackles)
- * Weight 2: Weight of complete packed set (with shackles and accessories)
- ** Shackles: We use standard GreenPin (type G-4163 or P-6036) shackles for our load links.

	A	B	C	D	E	F	G	H	L1	L2	Weight1*	Weight2*	Shackles**	Capacity	Resol.	Wireless
KR1.5	83	32	19	16	140	180	60	80	283	261	1,3 kg	11 kg	2.0t GP	1.5t	0.001	No
KR 5	131	58	38	26	160	123	68	140	390	355	3,5 kg	18 kg	6.5t GP	5 t	0.01	No
LE 5	151	68	42	30	108	165	-	105	380	330	1,4 kg	13 kg	8.5t GP	5 t	0.01	Yes
KR10	179	83	39	40	200	290	87	170	530	460	6,0 kg	27 kg	12t GP	10t	0.01	No
LE 12	179	83	42	37	120	210	-	105	450	385	2,0 kg	19 kg	12t GP	12 t	0.01	Yes
KR 20	244	126	59	60	280	410	130	215	790	700	18 kg	58 kg	25t GP	20 t	0.1	No
LE 25	244	126	58	53	131	255	-	125	660	570	4,0 kg	37 kg	25t GP	25 t	0.01	Yes
KR 35	270	138	70	70	345	490	150	240	900	810	28 kg	83 kg	35t GP	35 t	0.1	No
LE 35	270	138	58	60	147	305	-	158	702	612	5,3 kg	50 kg	35t GP	35 t	0.01	Yes
KR 50	330	180	80	80	410	600	180	270	1130	1010	50 kg	152 kg	55t GP	50 t	0.1	No
LE 50	330	180	80	73	170	345	-	150	893	763	8,8 kg	105 kg	55t GP	50 t	0.01	Yes
LE 85	376	190	100	85	190	410	-	186	1085	935	16 kg	165 kg	85t GP	85 t	0.1	Yes
LE 100	440	238	120	100	225	455	-	220	1260	1080	27 kg	265 kg	120t GP	100 t	0.1	Yes
LE 150	490	275	130	115	225	555	-	260	1380	1180	43 kg	380 kg	150t GP	150 t	0.1	Yes
SC150	490	275	130	120	420	680	-	248	1550	1340	36 kg	380 kg	150t GP	150 t	0.1	Yes
LE 200	600	310	190	145	330	680	-	300	1820	1560	87 kg	700 kg	250t GP	250 t	0.1	Yes
KR250	600	310	120	140	540	770	270	370	1940	1680	131 kg	740 kg	250t GP	250 t	0.1	No
LE 250	600	310	190	145	330	680	-	304	1820	1560	87 kg	700 kg	250t GP	250 t	0.1	Yes

