



WaterWeights

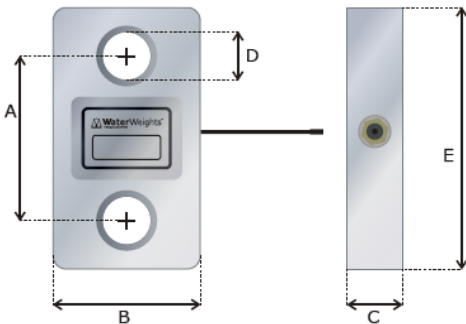

LE Series

The LE Series load link is the base model within Water Weights' load link range. The load link is available as the standard radio telemetry type and as non-telemetry version with communication cable. Microprocessor-based electronics within this model provide excellent power management and ensure maximum operational life from standard alkaline batteries. This load link will integrate with any of Water Weights' GL Series handheld display units. The LE Series is also available in an IS version.

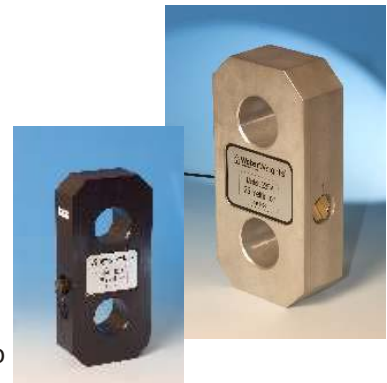

Technical Data

Material Aluminium or stainless steel
 Range Approx. 50 mtr.
 Safety factor 5: 1
 Enclosed IP66 data
 Temp Range -10 to +70 °C
 Battery life active Approx 250 hrs.
 Class accuracy 0,1 %

Note: all measurements on table A-E are in millimeters

Type	Model	A	B	C	D	E	Weight
5 ton	LE05T	108	105	41	30	164	1.4 kg
12 ton	LE12T	120	105	41	38	210	1.9 kg
25 ton	LE25T	131	125	58	53	255	4.0 kg
35 ton	LE35T	147	158	58	60	305	5.0 kg
50 ton	LE50T	170	150	78	73	345	8.5 kg
85 ton	LE85T	190	220	78	85	446	16 kg
100 ton	LE100T	228	220	120	100	455	24 kg
120 ton	LE120T	228	220	120	100	480	28 kg
150 ton	LE150T	255	260	125	115	555	40 kg
200 ton	LE200T	292	285	165	135	680	60 kg
250 ton	LE250T	330	304	190	145	680	87 kg