


LED Tooling Camera

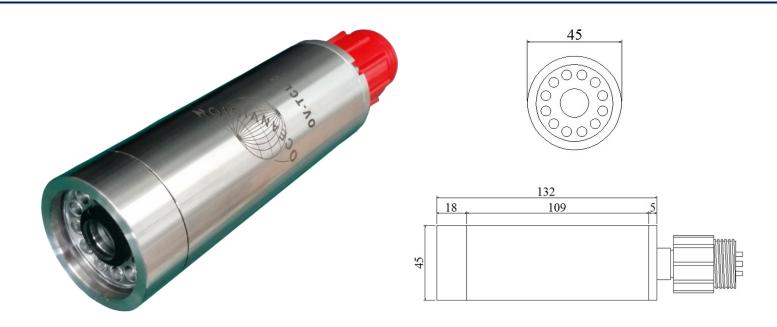

General Description

The mini color sub-sea tooling camera with LED Light Ring is the perfect choice for the offshore sub-sea ROV industry. It is manufactured in Stainless Steel AISI316L, is durable and maintenance free. With a standard composite 1.0Vp-p video signal with an SN ratio more than 50dB the unit will send a crisp and clear video signal to the operator. The focus is automatic. The perfect choice for a "plug-and-play" Solution. Delivered with standard sub-con 4-pin connector.

Details:

- Fixed lens: 3.7mm, 1/3" SONY Lens
- Length: 105mm + connector
- Width: Ø-46mm
- Weight: 0.7kg (air)
- Depth Rated to 3000m
- Resolution: Minimum 720TVL (SONY Super HAD EFFIO V CCD IICHIP, Typical TVL is 750)
- Minimum illumination: 0.01Lux. With Sense up (x256)
 0.00019Lux
- LED: 12 units (Optional Dimmable)
- 3D-DNR (Digital Noise Reduction)
- DPC Support (Dead Pixel Compensation)
- Power Supply: 9-24VDC, Max 5Watt
- Manufacturer: Unique System (SEA) Pte Ltd

Configuration(s):

- PAL Version
- Connector: MCBH4M) PN 902030 • NTSC Version Connector: MCBH4M) PN 902031
- Customer specified
 - connector and/or bracket "-1"