

SINGLE POINT MOORING ROPE

单点系泊缆绳

尼龙双编缆绳内芯为12股编织结构,外层包有编织护套。此结构耐磨好,强度高,为单点系泊的首选。缆绳两端眼环带金属保护套并有聚氨酯涂层保护,从而增加缆绳的耐磨性能。最后在缆绳上再加一定数量浮圈,以达到浮水的效果。

缆绳制造符合OCIMF2000标准要求。



Polyamide double braid rope is made up of 12-strand core with a protective cover. This design keeps high strength and good abrasion resistance performance; it is first choice for single point mooring. Both end with galvanized cast thimble and polyurethane protect, it would raise the abrasion resistance performance of rope. At last, put enough floats one by one from the end to end.

The rope manufacturing meets the requirements of OCIMF 2000.

材料:锦纶(尼龙)	Materials : Polyamide(Nylon)
密度:1.14g/cm ³	Specific Gravity: 1.14g/cm ³
熔点:215°C	Melting Point :215°C
耐磨性:非常好	Abrasion Resistance:Excellent
抗紫外线:好	U V Resistance: Good
抗化学腐蚀:好	Chemical Resistance: Good



● 新绳/New Rope ● 工作过的缆绳/Worked Rope

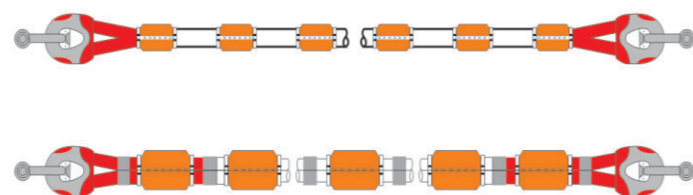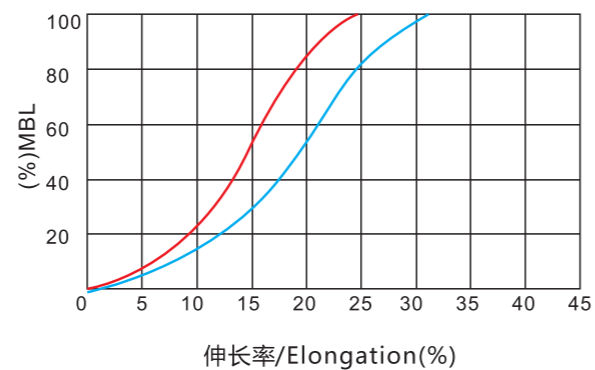

POLYAMIDE(NYLON) DOUBLE BRAID ROPE

锦纶(尼龙)双编缆绳

直径 Diameter	周长 Circ	重量 Weight	断裂强力 Breaking Strength(Ton)	
			单根 Single Leg	环形 Grommet
mm	inch	kg/100m		
80	10	398	148	252
88	11	482	179	304
96	12	572	208	354
104	13	672	250	425
112	14	772	288	490
120	15	887	327	556
128	16	1010	368	626
136	17	1140	419	712
144	18	1280	460	782
152	19	1420	501	852
160	20	1580	551	937
168	21	1740	599	1018

●如果需要其它尺寸,可以根据客户要求定制。 ● Other sizes are available upon request.